

Edge Uniboot Jumper Standard LCU Uniboot SM / Standard LCU Uniboot SM, SMF Ultra, 2F, DFX 250 Riser, Standard Yellow Jacket 1 Meters

CORNING

Part Number:
787802GD120001M

EDGE™ Reverse Polarity Uniboot Duplex Jumpers allow for the quick and easy conversion from a TIA-568 A-B polarity to a TIA-568 A-A polarity without exposing the fibers or needing any tools. This jumper comes with a straight-through polarity from the factory, but you can convert it to a flipped jumper. This uniboot design allows one cable to carry both fibers, reducing the jumper bulk when routing.

This product is available for Quick Connect 48 hour shipping. Learn more here:

[Quick Connect Program](#)

Features and Benefits

State-of-the-art manufacturing processes

Advanced technology results in unsurpassed product consistency and quality

Global operations


Mitigates trade barriers or supply disruptions

Flexible design options

Choice of materials for strength elements and fiber properties for various application requirements

Superior performance testing

Each termination is tested to ensure the highest network performance

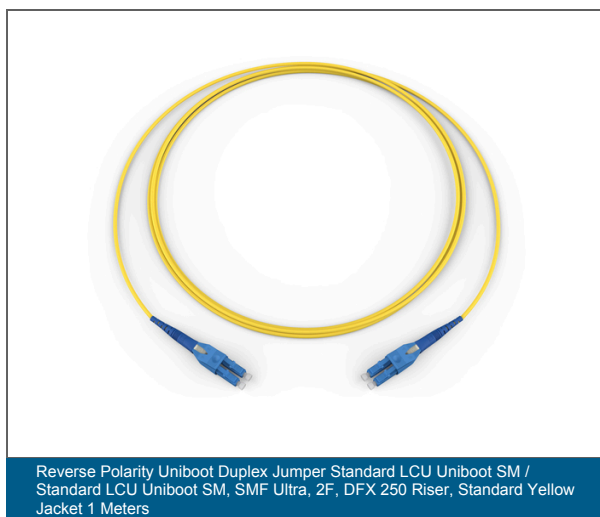

Reverse Polarity Uniboot Duplex Jumper Standard LCU Uniboot SM / Standard LCU Uniboot SM, SMF Ultra, 2F, DFX 250 Riser, Standard Yellow Jacket 1 Meters

Edge Uniboot Jumper Standard LCU Uniboot SM / Standard LCU Uniboot SM, SMF Ultra, 2F, DFX 250 Riser, Standard Yellow Jacket 1 Meters

CORNING

Specifications

General Specifications

Flame Rating	Riser (OFNR)
Fiber Category	Bend-improved Single-Mode (OS2)
Cable Assembly Type	Two Fiber
Application	Data Center, General Building Applications, Vertical Riser
Cable Type	Interconnect

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	2
Outer Jacket Color	Yellow

Mechanical Specifications

Minimum Bend Radius	10 mm (0.39 in)
Nominal Outer Diameter	2 mm (0.08 in)

Optical Characteristics

Fiber Code	G
Fiber Type	Single-Mode Ultra-Bendable Fiber
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Core Diameter	8.2 μ m
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 MHz*km / - / -
Serial 10 Gigabit Ethernet	10000 MHz*km / - / 40000 MHz*km

Edge Uniboot Jumper Standard LCU Uniboot SM / Standard LCU Uniboot SM, SMF Ultra, 2F, DFX 250 Riser, Standard Yellow Jacket 1 Meters

CORNING

Optical Characteristics

Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	OS2

Specifications - Connector A

Polish	UPC
Boot Color	Blue
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Housing Color	Blue
Housing Material	Composite

Specifications - Connector B

Polish	UPC
Boot Color	Blue
Connector Type	LC Uniboot
Ferrule Material	Ceramic
Housing Color	Blue

Ordering Information

Product Number	787802GD120001M
EAN Code	4056418148731
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.