

EDGE8® MTP® to LC Duplex Module 8F, 50 µm multimode (OM4)

CORNING

Part Number:
ECM8-UM08-05-E6Q-ULL

EDGE8® modules provide an interface between 8-fibre MTP®/MPO connectors and LC duplex connectors. Ultra-low-loss connectivity enables design flexibility to permit multiple potential connections within the system (e.g., 6-module link). These modules break out 8-fiber MTP terminations from the rear into 4x LC duplex connectivity at the front. The VFL-compatible shuttered adapters provide reliable dust protection without the need for dust caps and allow for easy fiber identification. All EDGE8 modules are manufactured with Corning® CleanAdvantage™ technology and an optimized MTP dust cap, eliminating the need for cleaning before initial field connection.

Features and Benefits

VFL-compatible shuttered LC adapters

Creates one-hand operation and decreases time needed to test and troubleshoot a link

Rear-loading capability

Decreases the time to prepare and install modules into fiber housings

High density


Module enables 576 fibers in a 4U housing and 144 fibers in a 1U

Low insertion loss performance

Improved performance specs allow for more mated pairs and/or longer link distances

Corning® CleanAdvantage™ technology and optimized dust cap

Eliminates the need for scoping and cleaning prior to initial field connection

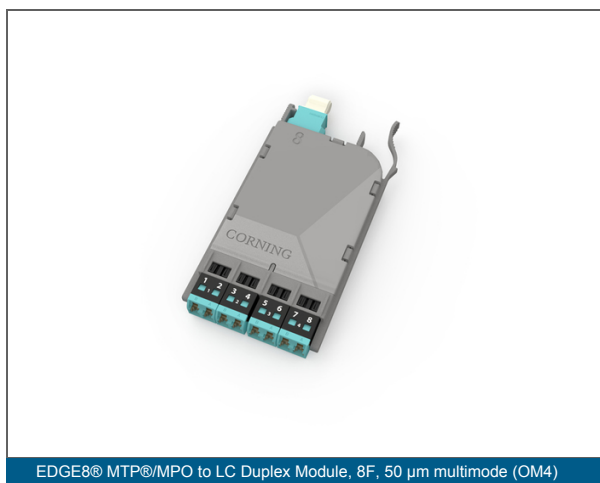

EDGE8® MTP® to LC Duplex Module 8F, 50 µm multimode (OM4)

CORNING

Specifications

General Specifications

Product Type	Panels and Modules
Fiber Category	50 µm MM (OM4)
Mounting Type	Rack Mount
Application	Data Center LAN/SAN

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	8
Adapter Type Back	MTP®/MPO
Adapter Color Back	Aqua
Adapter Color Front	Aqua
Adapter Type Front	Shuttered LC Duplex
Housing Type	Panels and Modules
Color	Gray
Panel or Module Type	EDGE8®
Number of Adapters per Panel	4

Cable Design

Polarity	Universal
----------	-----------

Design - Adapter

Adapter Type	SC
--------------	----

EDGE8® MTP® to LC Duplex Module 8F, 50 µm multimode (OM4)

CORNING

Optical Specification - Hardware

Module Insertion Loss, Max	0.35 dB
Wavelengths	850 nm / 1300 nm
Fiber Category	50 µm MM (OM4)

Connector Specs

Connector Type	MTP®/MPO (non-pinned)
----------------	-----------------------

Specifications - Connector A

Connector Type	MTP®/MPO (non-pinned)
Ferrule Material	Composite

Specifications - Connector B

Connector Type	LC Uniboot
Ferrule Material	Ceramic

Dimensions

Weight	19 kg
--------	-------

Ordering Information

Product Number	ECM8-UM08-05-E6Q-ULL
EAN Code	4056418036076
Package Contents	Modules packaged in individual blister packs
Units per Delivery	1/1

EDGE8® MTP® to LC Duplex Module 8F, 50 µm multimode (OM4)

The Corning logo is a solid blue square with the word "CORNING" in white, uppercase, sans-serif font centered within it.

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.