

EDGE8® Housings 4 U, holds up to 72 EDGE8 modules or adapter panels

CORNING

Part Number: EDGE8-04U

EDGE8® solutions are high-density preterminated optical cabling solutions with optimized design for Base-8 fiber applications offering industry-leading connector density. With sufficient connector finger access, there is no need for additional tools enabling faster moves, adds, and changes (MACs).

Features and Benefits

Smaller footprint design with Base-8 components in housings

Greater flexibility with six open slots per tray, for easy deployment of EDGE8® modules and panels

Key identifiers

EDGE8® printed on housing for easy identification as a Base-8 component

Sliding drawer-style hardware with integrated cable routing guides and port identification

Optimized finger access to connectors combined with industry leading port density

Integrated strain-relief plate can rotate 90°


Allows for rear cable entry direction, as well as the traditional side cable entry

Removable top covers on the 1U and 2U housings

Provides easier access to modules and panels

Quick mounting system

Enables one-person installation and depth adjustment of the housing in the rack

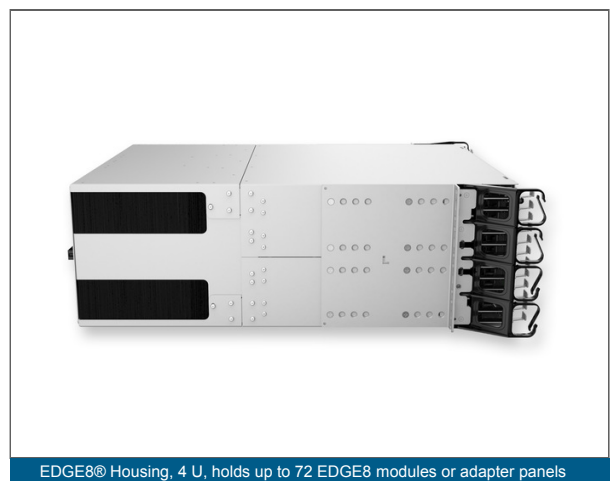

EDGE8® Housings 4 U, holds up to 72 EDGE8 modules or adapter panels



Specifications

General Specifications	
Product Type	Fiber Optic Hardware
Mounting Type	Rack 19-in
Application	Data Center
Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Design	
Number of Modules	72
Housing Type	EDGE™
Number of Panels per Housing	72
Panel or Cassette Type	EDGE8®
Panel or Module Type	EDGE8®
Fiber Capacity	576
Design - Adapter	
Housing Color	Silver
Connector Specs	
Housing Color	Silver
Dimensions	
Height	177 mm (6.97 in)
Depth	561 mm (22.09 in)

EDGE8® Housings 4 U, holds up to 72 EDGE8 modules or adapter panels

CORNING

Ordering Information

Product Number	EDGE8-04U
EAN Code	4056418139654
Package Contents	EDGE8™ Housing 4U; Quick Start Guide, #12-24 and #10-32 mounting screws, Cage Nut Mounting Kit, Velcro Strap, Fiber Optic Warning Label
Shipping Weight	16.5 kg
Height Unit	4 U
Units per Delivery	1/1
Shipping Height	327 mm (12.87 in)
Shipping Width	578 mm (22.76 in)
Shipping Depth	667 mm (26.26 in)



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.